

ISTRUZIONI TEMPLATE - XILMYO 2.0

ISTRUZIONI

QUANDO APRI IL TEMPLATE TROVERAI DUE LIVELLI DI LAVORO

1
LIVELLO "TEMPLATE":

Lasciare il livello bloccato.

A

STAMPA FRONTE / RETRO

Puoi stampare due grafiche:

- FRONTE
- RETRO

*(POSSONO ESSERE UGUALI O DIVERSE)

2

SAFE AREA:

Mantieni gli elementi importanti della grafica all'interno della linea rossa tratteggiata "Safe Area".

3

LIVELLO TUO DESIGN:

Inserisci la tua grafica nel livello, all'interno della linea verde, corrisponde all'area di stampa.

- Non spostare o eliminare alcuna riga
- La grafica deve essere inserita all'interno delle maschere di ritaglio chiamate "FRONT" e "BACK"

B
C

DESIGN:

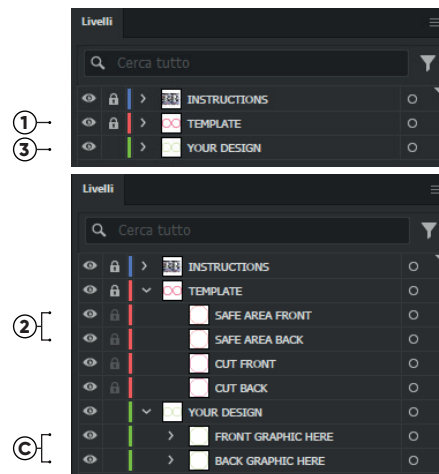
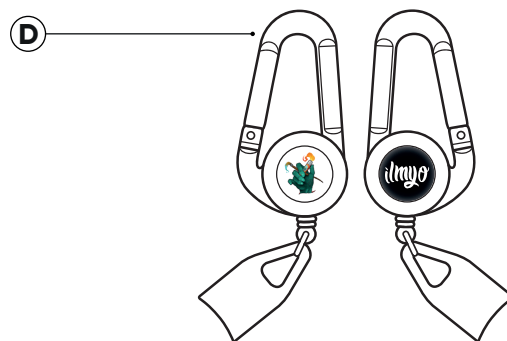
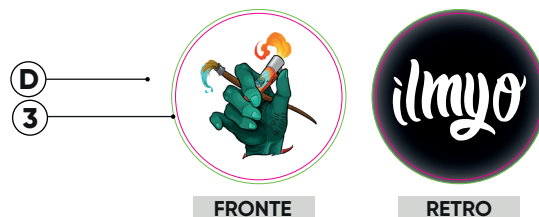
Il file deve essere un vettore o un'immagine.

- Espandere lo sfondo della tua grafica se essa lo richiede all'interno della maschera di taglio.
- Il file deve essere posizionato all'interno dell'area sicura. (esempio) **D**

⚠ ATTENTION: Non utilizzare tinte PANTONE®.

COLORI XILMYO 2.0:

 XILMYO 2.0 è disponibile in **7 COLORI**.

COLORI DISPONIBILI:

1
3
2
C

DESIGN IMAGES:

 Nei file forniti dai clienti, le grafiche devono essere **vettoriali**, o nel caso di **immagini** dovranno essere allegate o incorporate nel progetto finale.


Nel caso di immagini in formato PNG raccomandiamo una risoluzione di 300 DPI


IMPOSTAZIONI COLORE:

 È possibile stampare solo colori **CMYK**.

TESTI:

Nel caso siano presenti testi all'interno del file, è necessario convertirli in traccati.


FORMATO FILE:

Salva il file in pdf in alta qualità.

- È importante mantenere i livelli **TEMPLATE** e **YOUR DESIGN** divisi.

 Invia i tuoi file PDF, EPS, AI, PSD, JPG, PNG a: commerciale@ilmyo.it

TEMPLATE DESIGN INSTRUCTIONS - XILMYO 2.0

INSTRUCTIONS

WHEN OPENING THE TEMPLATE FILE YOU WILL FIND TWO LEVELS OF WORK

1
LEVEL " TEMPLATE ":

Leave the level locked.

A

FRONT/BACK PRINTING

You can print two graphics:

- FRONT
- BACK

*(THEY MAY BE THE SAME OR DIFFERENT)

2
SAFE AREA:

Keep important elements of the graphic within the red dotted line "Safe Area".

3
LEVEL "YOUR DESIGN":

Insert your graphics in this layer, inside the cutting line, it corresponds to the printable area.

- Do not move or delete any lines
- The graphics must be inserted inside the masks called "FRONT" and "BACK"

B
C

DESIGN:

The file must be a vector or image.

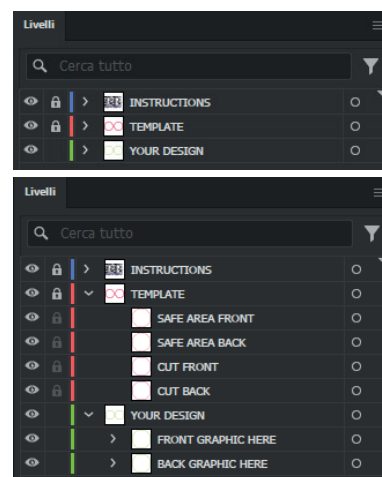
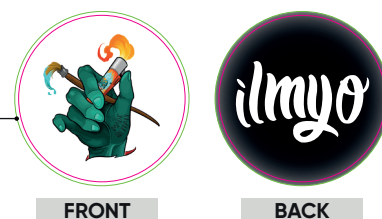
- Expand the background of your artwork if it requires it within the clipping mask.
- The file must be placed inside of the safe area. (example) **D**

⚠ ATTENTION: Do not use PANTONE®.

XILMYO 2.0 COLORS:

 XILMYO 2.0 is available in **7 COLORS**.

AVAILABLE COLOURS:

1
3
2
3

D
3


FRONT

BACK

D

DESIGN IMAGES:

 In the basic file sent by the customer, the graphics must be a **vector** or in the case of **images**, they must be attached or incorporated into the final design.


In the case of PNG images we recommend a png format with 300 DPI


COLOR MODE:

 Only **CMYK** colours are possible to print.

TEXT:

If there is text in your design, you need to convert into a text outline.


FILE FORMATS:


Save the file in pdf in high quality.

- It is important to keep the **CUT** and **YOUR DESIGN** layers divided


 To submit PDF, EPS, AI, PSD, JPG, PNG files at: commerciale@ilmyo.it

CUSTOMIZABLE AREA

DIRECT PRINTING



FRONT



BACK