

TEMPLATE DESIGN INSTRUCTIONS - ANODIZED ASHTRAY

INSTRUCTIONS

WHEN OPENING THE TEMPLATE FILE YOU WILL FIND TWO LEVELS OF WORK

LASER ENGRAVING CUSTOMIZATION

1

LEVEL "TEMPLATE":

This level must be locked

A



DEMO DESIGN:

This is a demonstration drawing.

The artwork must be placed inside the red line, this line corresponds to the printable surface, the drawing is to show the finished work.

B



SAFE AREA:

This line is the safe area.

Your graphics must be placed into this area.

- Do not move or delete any lines

2



LEVEL "YOUR DESIGN":

Insert the graphic in this level, inside the red line. It corresponds to the engraving area.


IMPORTANT NOTE: The file should be saved as a stroke only. (example) A

- Stroke**
Color Black Thickness: **0,25 pt**



DESIGN:

The file must be a vector or image.

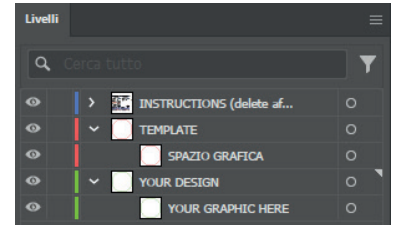

ILMYO logo con **RIEMPIMENTO** e **TRACCIA**



A

ILMYO logo con **TRACCIA 0,25 pt**



DESIGN IMAGES:

In the basic file sent by the customer, the graphics must be a **vector** or in the case of **images**, they must be attached or incorporated into the final design.



In the case of PNG images we recommend a png format with 300 DPI



COLOR MODE:

Only **CMYK** colours are possible to print.



TEXT:

If there is text in your design, you need to convert into a text outline.




FILE FORMATS:

Save the file in pdf in high quality.

- It is important to keep the **template** and **graphics** layers divided

To submit PDF, EPS, AI, PSD, JPG, PNG files at: commerciale@ilmyo.it




ISTRUZIONI D'USO TEMPLATE - POSACENERE ANODIZZATO

ISTRUZIONI

QUANDO APRIRAI IL FILE DI TEMPLATE TROVERAI DUE LIVELLI DI LAVORO

PERSONALIZZAZIONE INCISIONE LASER

- 1 **LIVELLO " TEMPLATE ":**
Lasciare il livello bloccato.
- A **DEMO DESIGN:**
Questo è un disegno dimostrativo.
La grafica va inserita all'interno della linea rossa, questa corrisponde all'area personalizzabile, il disegno ha lo scopo di mostrare il lavoro finito.
- B **SAFE AREA:**
Questa linea indica l'area di sicurezza.
Le tue grafiche vanno inserite all'interno dell'area.
 - Non spostare o eliminare alcuna riga.
- 2 **LIVELLO "YOUR DESIGN":**
Inserisci la grafica in questo livello, all'interno della linea verde corrisponde all'area d'incisione.
NOTA BENE: Il file deve essere salvato come traccia (esempio) A
 - **Traccia**
Colore nero Spessore: **0,25 pt**
- B **DESIGN:**
Il file deve essere un'immagine vettoriale.

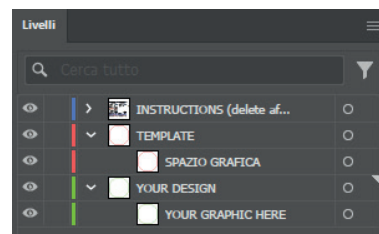

❌ ILMYO logo con **RIEMPIMENTO** e **TRACCIA**



✅ ILMYO logo con **TRACCIA 0,25 pt**



DESIGN IMAGES:

Nei file forniti dai clienti, le grafiche devono essere **vettoriali**, oppure, nel caso di **immagini raster**, devono essere incorporate all'interno del file.



Nel caso di immagini in formato PNG raccomandiamo una risoluzione di 300 DPI



IMPOSTAZIONI COLORE:

È possibile stampare solo colori **CMYK**.



TESTI:

Nel caso siano presenti testi all'interno del file, è necessario convertirli in tracciati.



FORMATO FILE:

Salvare il file in formato PDF per stampa di alta qualità.

- È molto importante mantenere i livelli **TEMPLATE** e **YOUR DESIGN** divisi.

Invia i tuoi file PDF, EPS, AI, PSD, JPG, PNG a: commerciale@ilmyo.it

METAL ASHTRAY

LASER ENGRAVING



CUSTOMIZABLE AREA

LASER ENGRAVING

