





TEMPLATE DESIGN INSTRUCTIONS - ROUND EXTRACTION JAR 30mm

INSTRUCTIONS

WHEN OPENING THE TEMPLATE FILE YOU WILL FIND FOUR LEVELS OF WORK

PRINTING CUSTOMIZATION

- ① **LEVEL " TEMPLATE ":**
Leave the level locked.
- Ⓐ **RED LINE:**
Safe area all important works of art must be placed within the red line.
- ② **LEVEL YOUR DESIGN:**
Insert your graphics into the level, inside the red line, it corresponds to the printable area.
- Ⓑ
 - Insert your graphic into the layer inside the bleeding box.
- Ⓒ **DESIGN:**
The file must be a vector or image.
 - Insert the file within the safe area. (example) Ⓓ
- ③ **LEVEL WHITE:**
Insert all your graphics into the level adding the **RDG_WHITE** color sample to all the printable elements.
 - ⚠ **In the elements without white, the colours are not opaque.**
- ④ **LEVEL GLOSS:**
Add the graphics you want to apply the glossy finish with the **RDG_GLOSS** color sample.

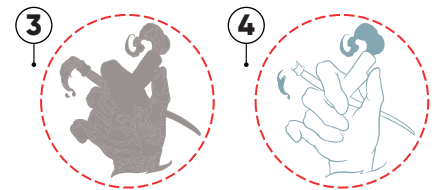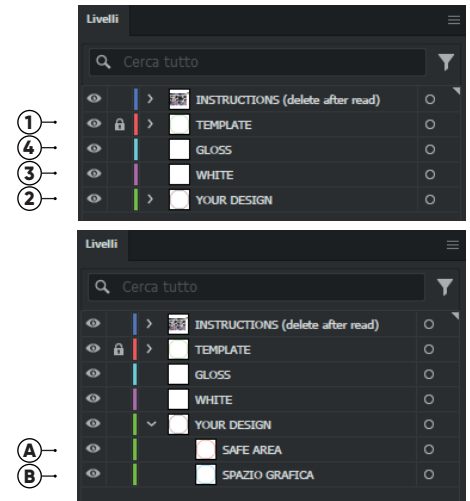

⚠ **ATTENTION:** Do not use PANTONE® colours.



DESIGN IMAGES:

In the basic file sent by the customer, the graphics must be a **vector** or in the case of **images**, they must be attached or incorporated into the final design.



In the case of PNG images we recommend a png format with 300 DPI



COLOR MODE:

Only **CMYK** colours are possible to print.



TEXT:

If there is text in your design, you need to convert into a text outline.



FILE FORMATS:

Save the file in pdf in high quality.

- It is important to keep the **template** and **graphics** layers divided

To submit PDF, EPS, AI, PSD, JPG, PNG files at: commerciale@ilmyo.it






ISTRUZIONI D'USO TEMPLATE - BARATTOLO ESTRAZIONE TONDO 30mm

ISTRUZIONI

QUANDO APRI IL FILE TEMPLATE TROVERAI QUATTRO LIVELLI DI LAVORO

PERSONALIZZAZIONE STAMPA

- 1 **LIVELLO "TEMPLATE":**
Lasciare il livello bloccato.
- A **LINEA DI MARGINE:**
Posizionare la grafica dentro il margine di stampa delimitato dalla linea rossa.
- 2 **LIVELLO "YOUR DESIGN":**
Inserisci la grafica in questo livello, all'interno della linea rossa, questa corrisponde all'area di stampa.
- B
 - Inserisci la tua grafica all'interno della maschera di ritaglio.
- C **DESIGN:**
Il file deve essere un'immagine vettoriale.
 - Inserisci il file all'interno del margine di sicurezza. (esempio) D
- 3 **LIVELLO "WHITE":**
Inserisci tutte le grafiche che dovranno essere stampate utilizzando il campione colore **RDG_WHITE**.
 - ⚠ **Negli elementi non coperti dal RDG_WHITE, i colori non risulteranno coprenti.**
- 4 **LIVELLO "GLOSS":**
Aggiungi le parti di grafica a cui venga applicata la finitura lucida utilizzando il campione **RDG_GLOSS**.

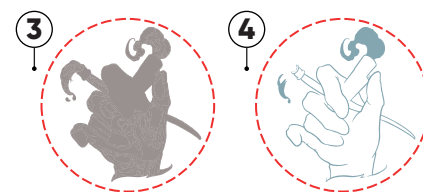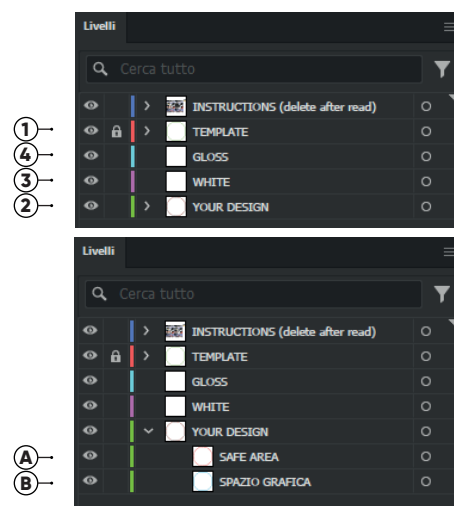

⚠ **ATTENZIONE:** Non utilizzare tinte PANTONE®



DESIGN IMAGES:

Nei file forniti dai clienti, le grafiche devono essere **vettoriali**, oppure, nel caso di **immagini raster**, devono essere incorporate all'interno del file.



Nel caso di immagini in formato PNG raccomandiamo una risoluzione di 300 DPI



IMPOSTAZIONI COLORE:

È possibile stampare solo colori **CMYK**.



TESTI:

Nel caso siano presenti testi all'interno del file, è necessario convertirli in tracciati.



FORMATO FILE:

Salvare il file in formato PDF per stampa di alta qualità.

- È molto importante mantenere i livelli **TEMPLATE** e **YOUR DESIGN** divisi.

Invia i tuoi file PDF, EPS, AI, PSD, JPG, PNG a: commerciale@ilmyo.it

VASETTO **ESTRAZIONE**

